

EBS | Innovation since 1977

HANDJET® EBS-260

YOUR PRINT
ANYWHERE



Your Print
Anywhere

Technology

Touchscreen

Allows you to create and edit messages in an instant and monitor print status.



Cartridge

Holds ink for up to 200,000 7 x 5 characters. Replacing a cartridge takes only seconds. Due to its unique design ink waste is reduced to 1%.



Communication

Numerous possibilities of communication – WiFi, Bluetooth, USB. A fast and easy way of importing and transporting data from external devices like computer or barcode readers.



Smart sensing

Message adapts to your speed.




Printing in any position

Easily print difficult to reach surfaces.



Li-Ion Battery

Mobile printing at its best! Printing on site? No power cord necessary for up to 16 hours.

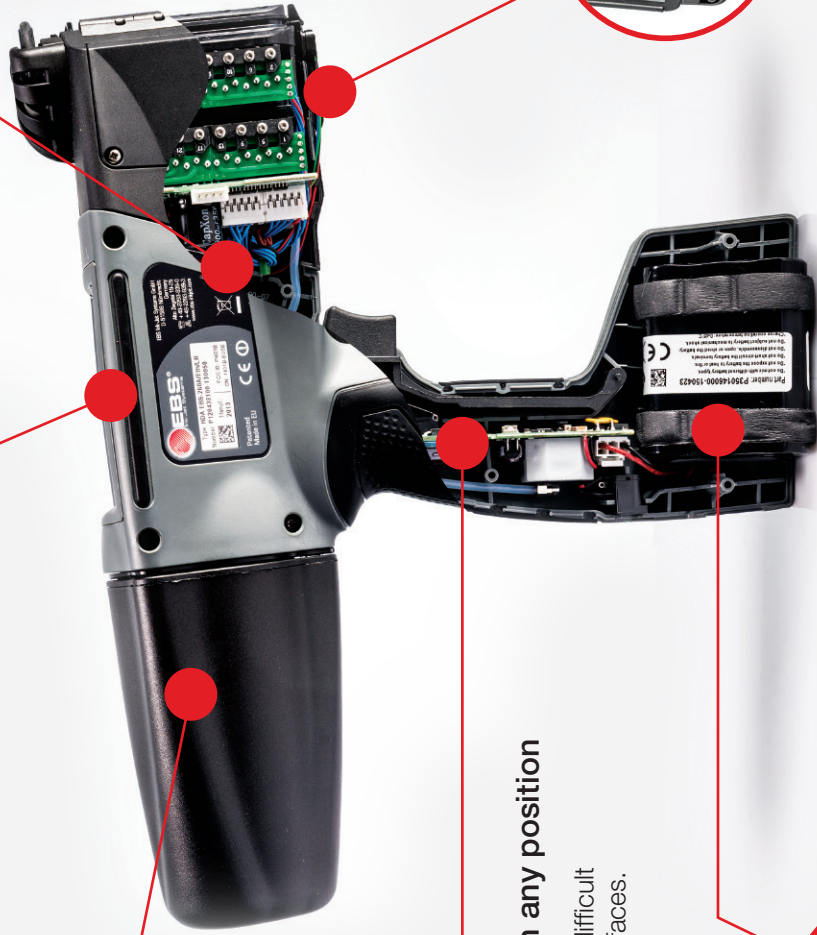


Printing capabilities

Clear, crisp print on wood and timber, including pallets and logs.



Allows for printing on difficult-to-reach parts and elements of industrial installations.



Provides a good quality print on both smooth and wrinkled stretch, as well as on bubble wrap.



Prints on large-size elements that cannot be moved.



What would you like to mark?



Can be used to easily mark concrete blocks, tiles, barrels, concrete ducts, etc.



Ensures a quality print on pipes and/or their insulation.



Technical data

Number of nozzles	32
Nozzle diameter	150 µm
Print height	from 10 mm (0.39") to 57 mm (2.24")
Text separation	built in line divider
Printer memory	2 GB, ≈ 50,000 messages
Number of text lines in one stroke	up to 5 lines (for 5×5 matrix)
Special characters	Graphic symbols, warning or transport marks, logos, etc.
Battery Power	Battery – 6 Li-Ion battery pack Capacity: 4400 mAh
Operating time with full battery	10 - 14 hours
Recharging	charging time – ≈ 3 hours
Cartridge volume	200 ml
Operating pressure	0.015 MPa up to 0.045 MPa (0.15 bar up to 0.45 bar)
Operating temp. range	from +5°C to +40°C (from 41°F to 104°F)
Storage temp. range	from + 1°C to +45°C (33.8°F to 113°F) for printer with water-based ink from -10°C to +45°C (14°F to 113°F) for printer with MEK- or ethanol-based inks
Humidity	up to 95% without steam condensation

www.ebs-inkjet-usa.com

Distributor:



EBS Ink-Jet Systems USA, Inc.
1840 Industrial Drive - Suite 200
Libertyville, IL 60048
Phone: 1-847-996-0739
E-mail: sales@ebs-inkjet.com
www.ebs-inkjet-usa.com

NEWAY  **PACKAGING**
CORPORATION

800.456.3929

www.newaypkgshop.com

Printed in U.S.A.
September 2022